


48 Frame Totally Enclosed Vertical Condenser Fan Motors
Permanent Split Capacitor – Energy Efficient, Electrically Reversible
1.0 SF – Sleeve & Ball Bearing – Continuous Duty, Air Over
60°C Ambient – 60 Hz – Thermally Protected

Features: Drain Holes with Plugs Each End • Continuous Duty, Air Over
 • Water Slinger on Shaft • All Angle Operation

Application: For Condenser Fans and Heat Pumps

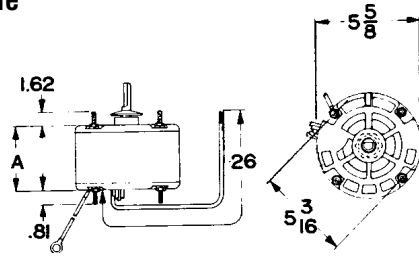

Totally Enclosed

Shaft Up/Down,
Horizontal

TOTALLY ENCLOSED – VERTICAL SHAFT UP/DOWN/HORIZONTAL

Stock No.	Hp	Volts	RPM**	Amps	Speeds	Capacitor	"A"	Shaft Diameter & Length	Iron Stack	Connection Diagram No.*	Notes
182	1/10	208-230	1075	0.7	1	5MFD-370V	3-3/4	1/2 x 6	3/4		
542	1/8	208-230	825	1.0	1	5MFD-370V	4-1/4	1/2 x 5-1/2	1-1/2	35u	1
629	1/6	208-230	825	1.2	1	5MFD-370V	4-1/4	1/2 x 6	1-3/4	17u	1
739	1/4	208-230	825	1.7	1	5MFD-370V	4-3/4	1/2 x 6	2	17u	
740	1/3	208-230	825	2.3	1	7.5MFD-370V	5	1/2 x 6	2-1/4	17u	
741	1/2	208-230	825	3.5	1	10MFD-370V	5-1/2	1/2 x 6	2-3/4	17u	
9402	1/6	208-230	1075	1.5	1	5MFD-370V	3-3/4	1/2 x 5	1		1.5
184	1/6	208-230	1075	.97	1	5MFD-370V	3-3/4	1/2 x 6	1	35u	
554	1/6-1/10	208-230	1075	1.0-.50	2	5MFD-370V	4	1/2 x 6	1	16u	2.3
176	1/4	208-230	1075	1.6	1	5MFD-370V	4	1/2 x 6	1-1/2	35u	
555	1/4-1/8	208-230	1075	1.6-.85	2	5MFD-370V	4	1/2 x 6	1-1/2	16u	2.3
567	1/4-1/8	208-230	1075	1.7-.89	2	7.5MFD-370V	4	1/2 x 6	1-1/4	41u	
788	1/4	460	1075	0.98	1	7.5MFD-370V	5	1/2 x 6	1-3/4	17u	2.4
175	1/3	208-230	1075	2.3	1	7.5MFD-370V	4-1/2	1/2 x 6	1-3/4	35u	
556	1/3-1/4	208-230	1075	2.0-1.3	2	7.5MFD-370V	5	1/2 x 6	2	16u	2.3
568	1/3-1/4	208-230	1075	2.0-1.3	2	7.5MFD-370V	4-1/2	1/2 x 6	1-3/4	41u	
789	1/3	460	1075	1.2	1	7.5MFD-370V	5-1/4	1/2 x 6	2	17u	2.4
187	1/2	208-230	1075	3.5	1	10MFD-370V	5	1/2 x 6	2-1/4	35u	
557	1/2-1/3	208-230	1075	3.3-2.0	2	7.5MFD-370V	5-1/2	1/2 x 6	2-1/2	16u	2.3
569	1/2-1/3	208-230	1075	2.9-1.8	2	10MFD-370V	5	1/2 x 6	2-1/4	41u	
790	1/2	460	1075	1.6	1	10MFD-370V	5-3/4	1/2 x 6	2-1/2	17u	2.4
755	1/2	460	1050	1.0	1	10MFD-370V	5-1/4	1/2 x 3-3/8	2-1/2		1.2
668	3/4	208-230	1075	4.3	1	15MFD-370V	5-3/4	1/2 x 6	3	35u	2.3
779	3/4	208-230	1075	5.1	1	10MFD-370V	5-1/4	1/2 x 6	2-1/2	35u	
791	3/4	460	1075	2.6	1	10MFD-370V	6-1/4	1/2 x 6	3	17u	2.4

- Notes:**
 1. Special OEM Replacement Motor (See Pages 97-122)
 2. Ball Bearings
 3. Stock #1218A Adapter and Rings Supplied for Base Mounting
 4. Includes Conduit Box, Mounting Screws, Gasket; Shipped Detached
 5. Not Electrically Reversible
 *See Pages 160-163 for Diagram
 **Approx 150 rpm between speeds